

INTERNATIONAL APPLICATION PUBLISHED LINDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification 5: G02B 21/00, G01N 21/64	A1	(11) International Publication Number: WO 92/01966 (43) International Publication Date: 6 February 1992 (06.02.92)
(21) International Application Number: PCT/GI (22) International Filing Date: 16 July 1991 (30) Priority data: 9015793.4 18 July 1990 (18.07.90)	(16.07.	patent), CA, CH (European patent), DE (European pa-
(71) Applicant (for all designated States except US): M RESEARCH COUNCIL [GB/GB]; 20 Park London WIN 4AL (GB).	EDIC/ Cresce	L Published With international search report.
(72) Inventor; and (75) Inventor/Applicant (for US only): AMOS, Willia shaw [GB/GB]; 54 Cavendish Avenue, Cambr 4UT (GB).	m, Bra idge Cl	l. 1

(54) Title: CONFOCAL SCANNING OPTICAL MICROSCOPE

(74) Agents: NASH, Keith, Wilfrid et al.; Keith W Nash & Co, Pearl Assurance House, 90-92 Regent Street, Cambridge CB2 1DP (GB).

(57) Abstract

A confocal scanning optical microscope in which a specimen under test is simultaneously scanned with two distinct spots or sitts of illumination (SI, S2), and two output beams emitted from the specimen due to relection or fluorescence are descanned and passed to separate stationary confocal apertures (AI, A2) and detectors (DI, D2)



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML.	Mali
BB	Barbados	FR	France	MN	Montolia
BE	Belgium	GA	Gabon	MR	Mauritagia
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benla	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CF	Canada	IT	Italy	RO	Romania
	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic	SE	Sweden
CH	Switzerland		of Korea	SN	Senegal
CI	Côte d'Ivoire	KR	Republic of Korea	SU+	Soviet Union
CM	Cameroon	Li	Liechtenstein	TD	Chad
cs	Czechoslovakia	LK	Sri Lanka	TG	Togo
DE	Germany	LU	Luxembourg	US	United States of America
DK	Denmark	MC	Monaco		

⁺ It is not yet known for which States of the former Soviet Union any designation of the Soviet Union has effect.

Title Confocal Scanning Optical Microscope

Field of the invention

This invention relates to an optical confocal scanning microscope.

Background to the invention

U.K. Patent Publication No. 2 184 321A discloses a confocal scanning optical microscope which is especially for the study of fluorescent or reflecting specimens. This instrument depends upon the focussing of light upon a single spot scanned over the specimen, which illuminated spot, after de-scanning, is imaged on a confocal aperture in front of a detector.

In the case where an image is to be formed of fluorescence from a specimen, the wavelength of the light directed on to the specimen is selected in such a way as to excite fluorescence. The emitted light is separated from the exciting light by a suitable beam splitter and is passed through wavelength-selective filters in such a way that the detector responds only to the light emitted by fluorescence. Instruments based on this design are commercially available. They contain a provision for subdividing the emitted light into beams of different wavelength ranges by a suitable beam splitter and filters. After this division, two dyes can be employed which emit different colours of fluorescence which can be distinguished at two detectors. Alternatively, a

reflectance image can be obtained at the same time as a fluorescence image by the use of suitable beam-splitters, in accordance with accepted optical practice.

The prior art instruments work satisfactorily but all confocal scanning microscopes which rely on the use of a single scanning spot suffer from the defect that all the spectral selectivity of the system lies in the separation of the emitted or reflected beam into fractions of different wavelength. If there is considerable overlap between the fluorescent emission spectra of two dyes, they cannot be distinguished. For example, Bacallao et al comment in the Handbook of Confocal Microscopy, Plenum Press, 1990, that the commonly-used dyes fluorescein and rhodamine cannot be separated effectively in a system of this type. In order to achieve acceptable separation, it is necessary to vary the wavelength of excitation. can be done by changing from one type of laser light to another, of spectrally different properties. First an image is obtained by operating the system with one type of excitation, and then a second image is obtained with a different type of exciting beam. This operation is slow and cumbersome.

Awamura, Ode and Yonezawa have described a microscope in which red, green and blue laser beams are scanned independently over the specimen, and the reflected beams are separated by dichroic filters and each executes a scanning motion over one of three separate linear CCD detector arrays. The description was published in the Proceedings of SPIE, The International Society for Optical Engineering (1987) Volume 765 pp 53-60. In principle, the system of Awamura et al might be used as a fluorescence microscope. It would then allow more than

one type of dye to be excited in rapid succession during each line scan. However, in the case of two dyes with identical emission spectra, or a single ratiometric dye where the emission spectrum was to be monitored in a single waveband, the system of Awamura et al offers no advantage over that of White (U.K. Patent Application No. 2 184 321A), since neither system is capable of separating the two emission signals.

The invention

According to the present invention, there is provided a confocal scanning optical microscope comprising:

- an optical scanning system;
- means for simultaneously generating two or more input beams of optionally different spectral composition and of differing orientations such that after passage through the scanning system a specimen under test is scanned with two or more distinct and separate elemental areas of illumination; and
- two or more detectors respectively for receiving two or more output beams after de-scanning by the scanning means, each detector receiving an output beam substantially restricted to output light derived from one of the illuminated elemental areas.

The invention allows for two or more microscope channels having different excitation wavebands but identical emission wavebands, in order to make possible excitation ratio image measurements according to accepted practice. The invention also allows for two or more microscope channels having identical excitation wavebands but different emission wavebands, in order to make possible emission ratio image measurements according to accepted practice.

The present invention is thus applicable to many kinds of scanning optical microscope. It provides a means by which two or more spectrally distinct exciting spots or bars can be scanned together over the specimen during each sweep of the scanning system. The emission from each spot is passed individually and separately to a stationary confocal aperture leading to a detector, there being at least one aperture and detector for each spot

The emitted beam from each spot, due to specimen fluorescence or reflection, may be filtered spectrally or subdivided between detectors in accordance with established practice, or may be passed unselectively to the detector. It is thus possible to obtain, within a single scanning cycle, two or more complete images, each of which may differ in both excitation and emission waveband from the other images.

The invention may be considered as "a multiplexed optical system" because it involves two or more sets of independent but near-parallel beam paths passing through the same scanning system and objective lens, the optical paths being multiplexed in the literal sense of being folded together.

Description of embodiment

Further features and advantages of the invention will be

apparent from the following description of embodiments, making reference to the accompanying drawings, in which:-

- Figure 1 is a schematic diagram of a confocal scanning microscope incorporating the multiplexed optical system of the present invention;
- Figure 2 is a schematic diagram showing an alternative
 and preferred optical arrangement for the upper
 part of Figure 1; and
- Figure 3 is a schematic diagram showing an optical means by which several beams of different spectral properties may be obtained from a single (e.g. a multiline) laser, for use in the present invention.

Referring to the drawings, the present invention provides an optical assembly which allows a number of independent optical channels to be used simultaneously for excitation in a laser confocal scanning microscope with an extended emission beam path, but is not restricted in application to this kind of microscope. The invention can be applied to confocal microscopes in which a bar or slit of light is scanned over the specimen as well as to those in which a single spot is scanned.

In Figure 1, to simplify the diagram, only two independent light paths are shown, but there is no restriction on number in practice.

Light from two lasers, L1 and L2, with different spectral qualities, is directed on to a beam splitter BS1. The

two beams are at a slight angle to each other, which angle is exaggerated in the diagram for the sake of clarity. The two beams are reflected into a scanning system as shown, which produces an angular scan of both beams simultaneously. The angular separation of the beams is maintained throughout the scan, and results, after passage through suitable microscope optics, typically an eyepiece E and an objective 0, in the formation of two distinct moving spots of light Sl and S2 on the specimen.

Light is emitted from the specimen at S1 because of reflection or fluorescence and a portion of this emitted light passes back through the optical system, is descanned, i.e. reconverted into a stationary beam by the scanning system, passes through the beam splitter BSl and falls on a confocal aperture Al leading to a detector Dl. Light from S2 passes through the optical system along a similar but distinct path and falls upon detector D2. The preferred angular separation is the smallest possible consistent with a satisfactory separation of the optical channels. To allow image registration, the small difference in time between the scanning of a given point in the specimen by the spots corresponding to S1 and S2 may be compensated by suitable conventional electronic means, for example by image processing software. not essential to the functioning of the system that the two or more spots should lie upon the same scan line.

In the preferred embodiment of Figure 2, the scanning device and microscope are not shown in the figure, but should be taken to be the same as in Figure 1. Beams from lasers L1 and L2 again pass at a small angle on to the beam splitter BS1. The returning beams, after passing through beam splitter BS1, pass to a second beam

splitter BS2, which has dichromatic properties, so that most of the light in one of the beams, Bl, passes through to confocal aperture Al and thus to detector Dl, while the other beam B2 is preferentially reflected to A2 and D2. This modification is preferred as it allows the use of the second beam splitter BS2 to achieve a selection of emission wavelengths, and also may be implemented by only slight modification of existing instruments. The separation of the emitted beams by wavelength may be improved by the addition of wavelength-selective filters F1 and F2.

The aiming of the emission beams, each on to the appropriate aperture Al or A2, may conveniently be achieved by the use of mirrors (not shown) interposed between BS2 and the detectors D1 or D2.

Additional mirrors and dichromatic reflectors may provide convenient means of achieving an appropriate angle between the input beams L1 and L2. For example, Figure 3 illustrates one of many possible means by which light from a single multiline laser L may be separated into beams of different spectral composition and angle.

In this case, a parallel-sided block B of glass or other transparent material is used to produce a small lateral separation of the beams according to wavelength. The angle between the beams is then adjusted by passing them through a prism P, where they undergo different angular deviations because of the dispersing power of the prism. By appropriate orientation of the prism, parallel beams, each corresponding to a single wavelength, are generated, which converge towards the beam splitter BS1. The angle of convergence is determined by the angle of the prism and

its refractive index and dispersive power. In the diagram, the solid line S indicates a beam at a shorter wavelength, which is more strongly refracted than the beam, shown by the dashed lines D, corresponding to light of a longer wavelength.

Various modifications of the above-described and illustrated arrangements are possible within the scope of the invention hereinbefore defined.

Claims

- 1. A confocal scanning optical microscope comprising:
- an optical scanning system;
- means for simultaneously generating two or more input beams of optionally different spectral composition and of differing orientations such that after passage through the scanning system a specimen under test is scanned with two or more distinct and separate elemental areas of illumination; and
- two or more detectors respectively for receiving two or more output beams after de-scanning by the scanning means, each detector receiving an output beam substantially restricted to output light derived from one of the illuminated elemental areas.
- A microscope according to claim 1, in which the two or more beams define two or more microscope channels having different excitation wavebands but identical emission wavebands.
- A microscope according to claim 1, in which the two
 or more beams define two or more microscope channels
 having identical excitation wavebands but different
 emission wavebands.
- 4. A microscope according to claim 1, in which the two
 or more beams define two or more microscope chanels having
 different excitation wavebands and different emission


wavebands.


- 5. A microscope according to any of claims 1 to 4 in which the emission from each elemental area is passed individually and separately to a stationary confocal aperture leading to a detector, there being at least one aperture and detector for each area.
- A microscope according to any of claims 1 to 5, in which the elemental areas are in the form of spots or bars.
- A microscope according to claim 6, being a slitscanning confocal microscope in which the bars are generated by images of slits.
- 8. A microscope according to any of claims 1 to 7, in which the input beams are set at a small angle to one another.
- A microscope according to any of claims 1 to 8, in which the input beams are obtained by dividing the light from a multiline laser.
- 10. A microscope according to any of claims 1 to 9, in which a beam splitter provides for separation of output beams.
- 11. A microscope according to any of claims 1 to 9, in which separation of the output beams by wavelength is enhanced by one or more wavelength-selective filters.
- 12. A microscope according to any of claims 1 to 11, in which the distinct input beams are obtained by passing a


multiple wavelength beam through a prism.

13. A microscope according to any of claims 1 to 12, in which difference in path length times relating to the different scanned elemental areas is compensated for electronically.



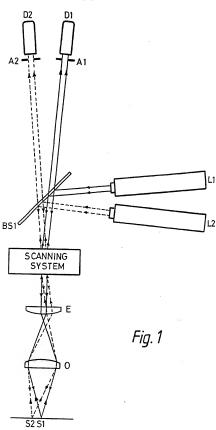





		INTERNATIONA	L SEARCH REPORT	F/OD 01/01176
I. CLASS	IFICATION OF SUBJ	ECT MATTER (if several classificat	r C	/GB 91/01176
According Int.		t Classification (IPC) or to both Nation G 02 B 21/00	mat Classification and IPC G 01 N 21/64	
II. FIELD	S SEARCHED			
		Minimum De	ocumentation Searched [†]	
Classifica	tion System		Classification Symbols	
Int.C	1.5	G 02 B	G 01 N	
			other than Minimum Documentation tents are Included in the Fields Searched ⁸	
W 000	ACTA COLUMNIA	D TO BE RELEVANT		
Category *		cument, 11 with Indication, where app	mariate of the value are narrange 12	Relevant to Claim No.13
Caregory	Citation of Do	cament, with intreation, where app	HOPTISHE, OF the Fellowalit passages -	Referant to Claim No.
A	1975,	918812 (D.M. HOLM) see abstract; figure olumn 6, line 40	11 November s 2,3; column 4, line	1,9,12
A	COÚNCI	L84321 (MEDICAL RESI) 17 June 1987, see in the application)		1
A		331880 (JENAOPTIK J see the whole docume		1
A	1990, s	column 3, line 67 -	5-9; column 2, lines	1,5,6,7 ,10,11
"A" doct "E" earl fille "L" doct white citat "O" doct othe "P" doct	sidered to be of particul- ier document but pohilis ig date meet which may throw th is cited to establish it idon or other special rea- ument referring to an or r means meent published prior to t than the priority date	ral state of the art which is not at relevance hed oo or after the international doubts on priority claim(s) or he publication date of another son (as specified) al disclosure, use, exhibition or the loternational filing date but	"I later document published after the loter chief to inferential the principle or the lovernion." **Comment of particular relevance; that of the lovernion. **Comment of particular relevance; that of exclusive he lovernion is brusteries report or exclusive he lovernion is brusteries report or exclusive the lovernion is brusteries. The lovernion is brusteries reported by the lovernion is brusteries. The lovernion is brusteries are comments are comments are comments are comments. See the lovernion is the lovernion in the lovernion is the lovernion in the lovernion in the lovernion is the lovernion in the lovernion in the lovernion is the lovernion in the lovernion in the lovernion is the lovernion in the lovernion in the lovernion is the lovernion in the loverni	the application but say underlying the aimed invention considered to aimed invention title step when the other such docu- to a person skilled
	count Completion of th	International Search	Date of Mailing of this International Sec	arch Report

10-10-1991

EUROPEAN PATENT OFFICE

Form PCT/ISA/210 (second sheet) (January 1985)

International Applica No Page 2 PCT/GB 91/01176

	TS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET) Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
ategory °	Cytometry, volume 2, no. 4, 1982, (US) J.A. Steinkamp et al.: "Three-color fluorescence measurements on single cells excited at three laser wavelengths", pages 226-231, see figures 1-3; page 227 - page 228, column 2, line 16 US,A,4284997 (I. SAWAMURA) 18 August 1981, see the whole document	1,2,4-7 ,10,11
	1961, See the Mibre document	
		·
	•	
	•	
		- X
-		
İ		
İ		
	:	
1		

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

GB 9101176 SA 49462

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDF file on 64/11/91 The European Patent Office is in a way liable for these particulars which are metely given for the purpose of information.

BE-A 814460 02-09- CA-A 1020234 01-11- DE-A 2422016 08-19- GB-A 2184321 17-06-87 None DE-A 3831880 03-05-89 None US-A 4893008 09-01-90 JP-A 63306413 14-12- IIS-A 4284897 18-08-81 JP-C 1154952 15-07-	BE-Ä- 814460 02-09-74 CA-Ä- 1020234 01-11-77 DE-Ä- 2422016 28-11-74 FR-Ä,B 2229063 06-12-74 GB-Ä- 1446789 08-09-76 JP-Ä- 50016597 21-02-75 2184321 17-06-87 None 1831880 03-05-89 None 1893008 09-01-90 JP-Ä- 63306413 14-12-88	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A- 3831880 03-05-89 None US-A- 4893008 09-01-90 JP-A- 63306413 14-12- US-A- 4284897 18-08-81 JP-C- 1154952 15-07-	1831880 03-05-89 None 1893008 09-01-90 JP-A 63306413 14-12-88 1284897 18-08-81 JP-C 1154952 15-07-83 JP-A 5313560 27-11-78 JP-B 57049888 25-10-82	US-A- 3918812	11-11-75	BE-A- 81446 CA-A- 102023 DE-A- 242201 FR-A,B 222906 GB-A- 144878	0 02-09-74 4 01-11-77 6 28-11-74 3 06-12-74 9 08-09-76
US-A- 4893008 09-01-90 JP-A- 63306413 14-12- US-A- 4284897 18-08-81 JP-C- 1154952 15-07-	1893008 09-01-90 JP-A- 63306413 14-12-88 1284897 18-08-81 JP-C- 1154952 15-07-83 JP-B- 53135660 27-11-78 JP-B- 57049888 25-10-82	GB-A- 2184321	17-06-87	None	
US-A- 4284897 18-08-81 JP-C- 1154952 15-07-	2284897 18-08-81 JP-C- 1154952 15-07-83 JP-A- 53135660 27-11-78 JP-B- 57049888 25-10-82	DE-A- 3831880	03-05-89	None	
	JP-A- 53135660 27-11-78 JP-B- 57049888 25-10-82	US-A- 4893008	09-01-90	JP-A- 6330641	3 14-12-88
JP-B- 57049888 25-10-		US-A- 4284897	18-08-81	JP-A- 5313566 JP-B- 5704988	0 27-11-78 8 25-10-82
	•				
	•				